


# HS and HB Models

50/60 Hz AC Frequency Power Converter  
500 to 1200VA

## Outline Drawing

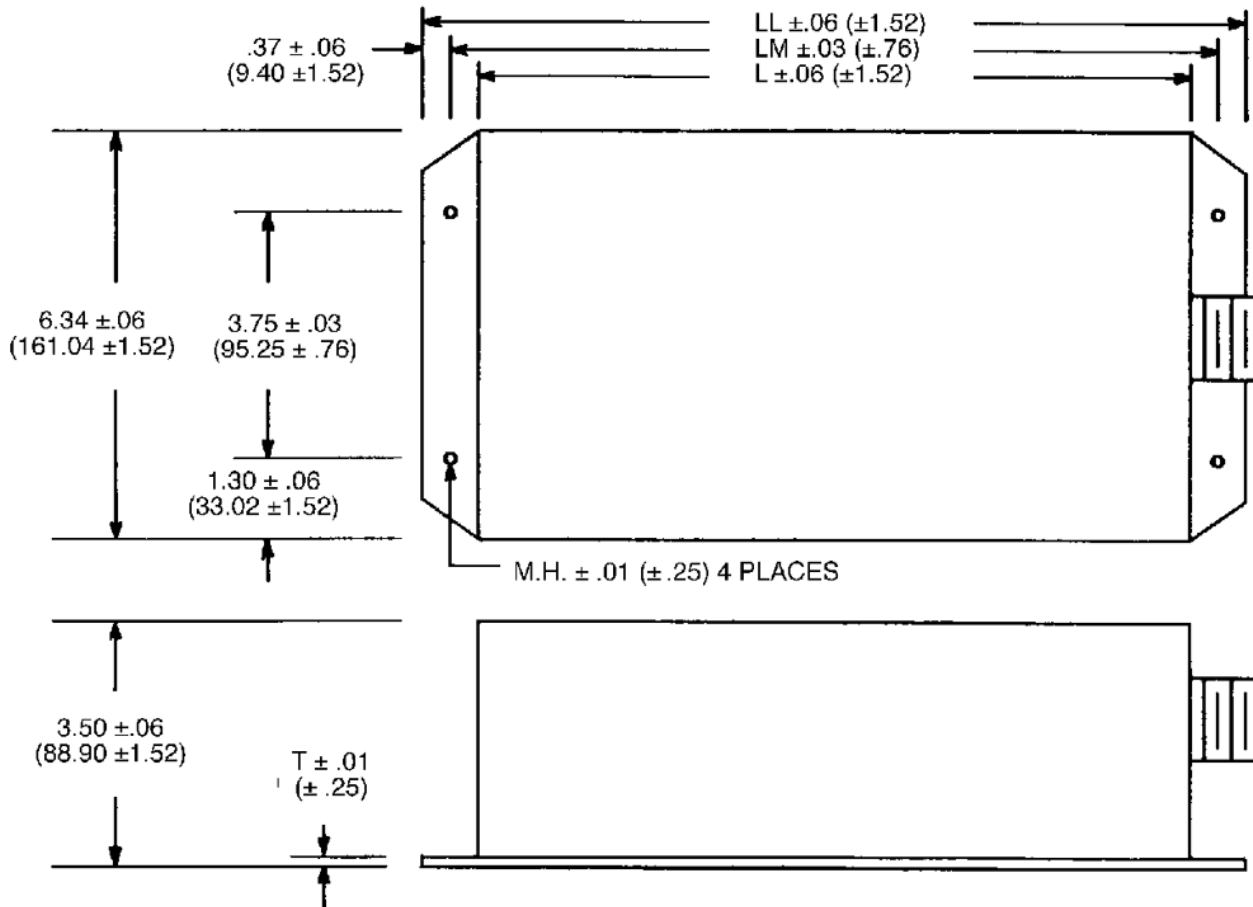

DIMENSIONS ARE IN INCHES (MILLIMETERS)

Model	Input Current (A/PH)	Output				Dimensions (See Figure 1)					Wt Lb (Kg) $\pm$ 5%
		Voltage (VRMS) $\pm$ 5%	Current (A) RMS	Frequency (Hz) $\pm$ .5 Hz	Power (VA)	LL Inch (MM)	LM Inch (MM)	L Inch (MM)	T Inch (MM)	M.H. Inch (MM)	
HS50	2.0	115	4.3	60	500	9.50 (241.30)	8.75 (222.25)	8.09 (205.49)	.06 (1.52)	.20 (5.08)	4.4 (2.00)
HS100	3.4	115	8.7	60	1000	12.00 (304.80)	11.25 (285.75)	10.60 (269.64)	.08 (2.03)	.28 (7.11)	7.5 (3.40)
HS120	4.5	115	10.4	60	1200	12.00 (304.80)	11.25 (285.75)	10.60 (269.64)	.08 (2.03)	.28 (7.11)	7.5 (3.40)
HB100	3.4	230	4.3	50	1000	12.00 (304.80)	11.25 (285.75)	10.60 (269.64)	.08 (2.03)	.28 (7.11)	7.5 (3.40)
HB120	4.5	230	5.2	50	1200	12.00 (304.80)	11.25 (285.75)	10.60 (269.64)	.08 (2.03)	.28 (7.11)	7.5 (3.40)



electronics

418 East Live Oak Avenue, Arcadia CA 91006-5619 USA ■ Phone: 626-574-1175 ■ Fax: 626-574-0553 ■ info@kgselectronics.com