


SS and SB Models

50/60 Hz LIGHTWEIGHT SINEWAVE
1000 VA to 1200 VA Static Inverters

Outline Drawing

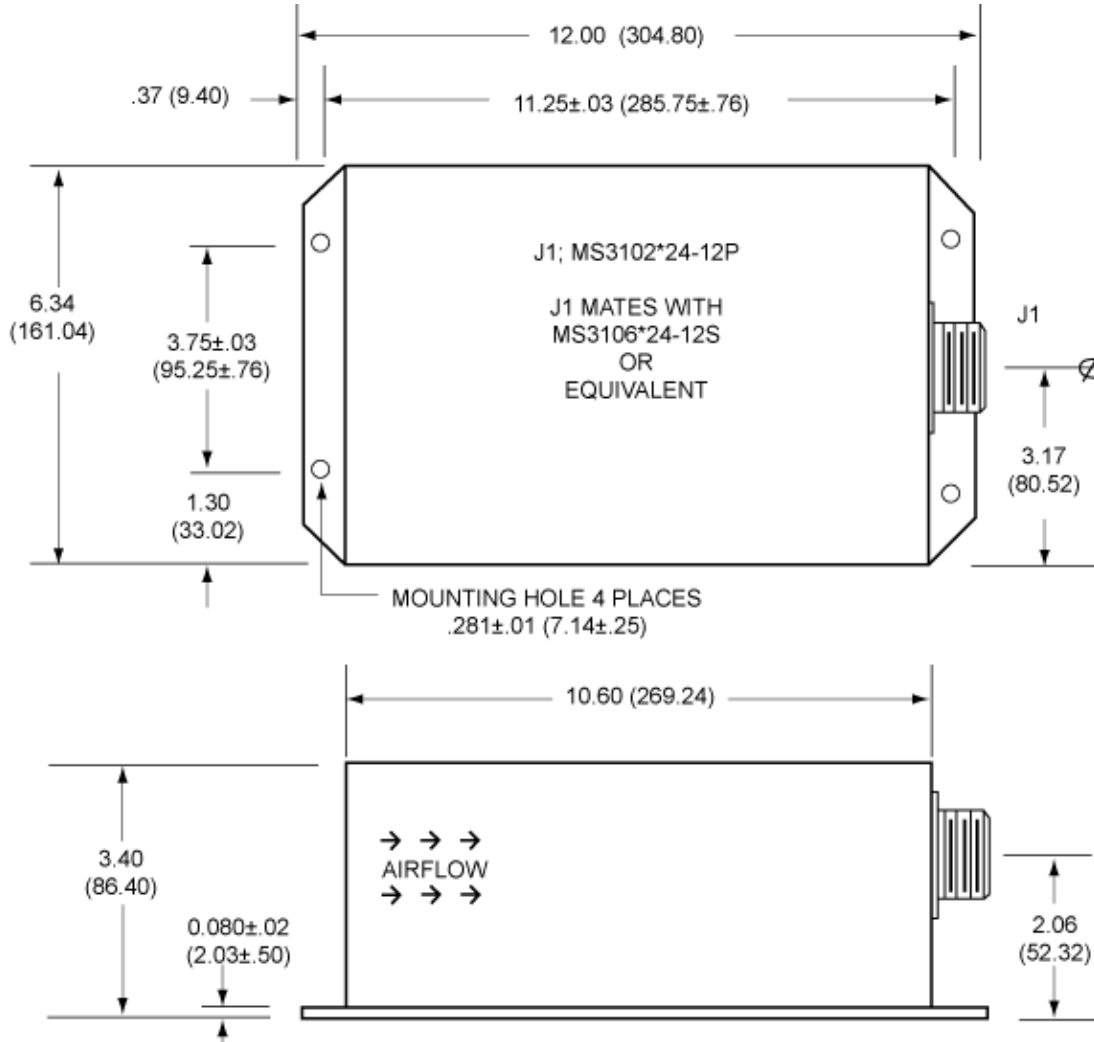

DIMENSIONS ARE IN INCHES (MILLIMETERS)

Model Specifications:												
MODEL	INPUT	OUTPUT				DIMENSIONS (See FIGURE 1)						WT.
	Curr (ADC)	Volts (Vrms) ±5%	Curr (A rms)	Freq HZ	Power VA	H IN (mm)	LL IN (mm)	LM IN (mm)	L IN (mm)	T IN (mm)	MH IN (mm)	LB (KG) ±5%
SS100 SS101	41.5	115	8.6	60	1000	3.40 (86.36)	12.0 (304.8)	11.25 (285.75)	10.60 (269.24)	.08 (2.03)	.28 (7.11)	7.4 (3.36)
SS120 SSA120	50.0	115	10.3	60	1200	3.40 (86.36)	12.0 (304.8)	11.25 (285.75)	10.60 (269.24)	.08 (2.03)	.28 (7.11)	7.7 (3.50)
SW100	41.5	230	4.3	60	1000	3.40 (86.36)	12.0 (304.8)	11.25 (285.75)	10.60 (269.24)	.08 (2.03)	.28 (7.11)	7.4 (3.36)
SB100 SB101	41.5	230	4.3	50	1000	3.40 (86.36)	12.0 (304.8)	11.25 (285.75)	10.60 (269.24)	.08 (2.03)	.28 (7.11)	7.4 (3.36)
SB120	50.0	230	5.2	50	1200	3.40 (86.36)	12.0 (304.8)	11.25 (285.75)	10.60 (269.24)	.08 (2.03)	.28 (7.11)	7.7 (3.50)



electronics

418 East Live Oak Avenue, Arcadia CA 91006-5619 USA ■ Phone: 626-574-1175 ■ Fax: 626-574-0553 ■ info@kgselectronics.com